

Status: 09/2019



Products need labeling  
Print and apply systems



**HERMES Q**

Made in Germany

Please note:

HERMES Q will replace the Hermes+ series at the end of 2019.

[www.cab.de/en/hermesplus](http://www.cab.de/en/hermesplus)



# HERMES Q

Designed for automated printing and labeling in production lines

1.1



## The slim one

to print small labels

Label printer		HERMES Q2	
Printable resolution	dpi	300	600
Print speed	up to mm/s	300	150
Print width	up to mm	56.9	54.1
Label roll outside diameter	mm	205 / 305	
Label width	up to mm	58	

1.2



## The universal one

Best-selling industrial device, offering a wide range of accessories

Label printer		HERMES Q4.3		HERMES Q4	
Printable resolution	dpi	200	300	300	600
Print speed	up to mm/s	300	300	300	150
Print width	up to mm	104	108.4	105.7	105.7
Label roll outside diameter	mm	205 / 305			
Label width	up to mm	114			

1.3



## The wide one

to print Odette, UCC and GS1 labels in logistics applications

Label printer		HERMES Q6.3	
Printable resolution	dpi	200	300
Print speed	up to mm/s	250	250
Print width	up to mm	168	162.6
Label roll outside diameter	mm	205 / 305	
Label width	up to mm	174	

## Labels on rolls

HERMES Q2, Q4, Q6.3



Label roll diameter 205 mm

HERMES Q2, Q4, Q6.3



Label roll diameter 305 mm

## Slim labels

on rolls or reels

HERMES Q2...S



To prevent from folding, labels with liner materials up to 20 mm in width have to be guided centered to the ribbon. Due to that spacers are necessary. These are manufactured order-related.

## Directions of label transfer

HERMES QL



to the left

HERMES QR



to the right

## Covers

HERMES Q2, Q4, Q6.3



suitable for roll diameters up to 205 mm

## Sample applications

PCB labeling



Package labeling



Container labeling



# Details



## 1 Operation panel

Operating the device is intuitive and simple with the help of self-explanatory symbols to configure settings.

## 2 Ribbon holder

Three-part tightening axles enable the ribbon to be replaced quickly and easily.

## 3 Rugged metal chassis

made of cast aluminum; basis to assemble all units

## 4 Applicator assembly

They are mounted on hinge pins and can be pivoted in the case of material replacement or maintenance.

## 5 Plungers

One plunger is fixed on the inner side. A second one is moved that far to the label margin, until a good print image evokes.

## 6 Print head

All print heads are freely interchangeable at equal width. Easy replacement

## 7 Automatic ribbon saving (option)

The print head is lifted during label feed and the ribbon is stopped.

## 8 Print roller removal

It can be easily removed or inserted in the cases of cleaning or wear.

## 9 Peel-off plate, pivoted

to improve label transfer onto packaging.

## 10 Label unwinder

By means of the swing lever and a brake integrated, labels are unwound with constant tension.

## 11 Liner tape rewinder

After all the labels have been transferred, the liner tape is fully rewound. The three-part tightening axle allows the liner tape to be inserted and removed easily.

## 12 Label sensor







A gap sensor or a reflective sensor position the imprint precisely on the label and detect the end of the material.

### Imprint accuracy

The smaller a label, the higher are the requirements on the imprint accuracy. With the help of the adjustable slip correction, print offset can be reduced by  $\pm 0.2$  mm.

# Operation panel

**Operating the device is intuitive and simple with the help of self-explanatory symbols to configure settings.**

- 1 **LED signal:** Power ON
- 2 **Status bar:** data reception, record data stream, ribbon pre-warning, SD memory card / USB memory stick plugged in, Bluetooth, WLAN, Ethernet, USB slave, time
- 3 **Printer status:** Ready, Pause, number of labels printed in a print job, label in peel-off position, awaiting external start signal
- 4 **USB slot** to connect the Service Key or a memory stick, in order to transfer data to the IFFS memory
- 5 **Operation**
  -  Printing and labeling in individual steps
  -  Jump to menu
  -  Reprint last label
  -  Interrupt and continue print job
  -  Stop and delete all print jobs
  -  Label feed




Setup options



Print parameters



Print position Y

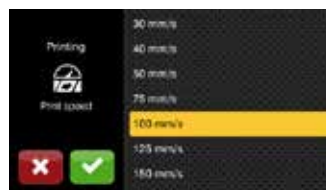

Print speeds

**Depending from the orientation of assembly, display is either in landscape or portrait mode.**



Printer rotated by 90°



Video tutorials

# External operation panel

**providing the same functionality as on the printer**

Display in landscape or portrait mode

Users are free to choose whether to operate the printer on the external panel or on the one integrated in the device.

Printer connection: USB 2.0 Hi-speed device

- 1 **LED signal:** Power ON
- 2 **USB slot** to connect the Service Key or a memory stick, in order to transfer data to the IFFS memory
- 3 **Connecting cable USB**, lengths 1.8 to 16 m  
If length succeeds 3 m, use only specified cables.  
For dimensions see assembly instructions



## Print heads



**All print heads are freely interchangeable at equal width. They are automatically detected and calibrated by the CPU. The print distance to the locating edge can be adjusted.**

Major data such as running performance, maximum operating temperature and heat energy are directly stored in the print head. The data can be read at the plant.

**Print heads for HERMES Q2, HERMES Q4 - 300, 600 dpi**  
providing sharp-edged print images  
suitable for small fonts and graphics on typeplates  
suitable for markings on materials with high energy needs

**Print heads for HERMES Q4.3, HERMES Q6.3 - 200, 300 dpi**  
durable; suitable for rough surroundings and thermal direct printing

## Print rollers



**Two types of material:**

### Print rollers DR

Coating: synthetic rubber

They suit for highly accurate imprint and are provided as standard.

### Print rollers DRS

Coating: silicone

They have an extra long service life at a higher imprint tolerance.

## Interfaces



**1** to connect a **SD memory card**

**2** **2 x USB Host** to connect a Service Key, USB memory stick, keyboard, USB Bluetooth adapter, WLAN stick, warning light, an external operation panel

**3** **USB 2.0 Hi-speed device** to connect a PC

**4** **Ethernet 10/100 Mbit/s**

**5** **RS232C** 1,200 to 230,400 baud/8 bit

**6** **Digital I/O interface;** 25 pin SUB-D socket connector compliant with IEC/EN 61131-2, type 1+3, All inputs and outputs are galvanically isolated and protect from reverse polarity. In addition, outputs are short circuit protected.

### Inputs PNP

Start printing or labeling  
Print first label  
Reprint  
Delete print job  
Label removed  
Stop printing or labeling  
Label feed  
Label rotation 90° for appl. 4214  
Pause  
Reset

### Outputs PNP, NPN

Device ready  
Print data available  
Initial / upper end position  
Paper feed ON  
Label in peel-off position  
Label transfer / lower end position  
Pre-warning to ribbon ending  
Pre-warning to labels ending  
End of ribbon and/or end of labels  
Collective error

Accessory:

**7** **2-Port Ethernet Switch 10/100 Mbit/s**

# Technical data

● typical ■ standard □ option

Label printer		Type	HERMES Q2		HERMES Q4.3		HERMES Q4		HERMES Q6.3	
Printing method	Thermal transfer		●	●	●	●	●	●	●	●
	Thermal direct		-	-	●	●	-	-	●	●
Printable resolution	dpi		300	600	200	300	300	600	200	300
Print speed	up to mm/s		300	150	300	300	300	150	250	250
Print width	up to mm		56.9	54.1	104	108.4	105.7	105.7	168	162.6
Direction of label transfer			L to the left or R to the right							
Print distance to locating edge	mm		1	1	1	1	1	1	1	1
	with autom. saving L/R mm		-	-	2.2/1.6	0/-0.7	1/1	1/1	2.2/2.2	4.9/4.9
<b>Material</b>										
Labels			Paper, PET, PE, PP, PI, PVC, PU, acrylate, Tyvec							
	on roll		●		●		●		●	
	on reel		●		-		-		-	
Labels <sup>1)</sup>	Width	mm	4 - 58		10 - 114		10 - 114		46 - 174	
	Height	from mm	3		4		4		6	
	Thickness	up to mm	0.60		0.60		0.60		0.60	
Liner material	Width roll	mm	24 - 62		24 - 118		24 - 118		50 - 178	
	reel	mm	10 - 62		-		-		-	
	Thickness	up to mm	0.16		0.16		0.16		0.16	
Roll unwinder	Outside diameter roll	up to mm	205 / 305		205 / 305		205 / 305		205 / 305	
	reel	up to mm	205		-		-		-	
	Core diameter	mm	76							
	Winding		outside or inside							
Roll rewinder	Outside diameter	up to mm	155 / 205							
	Core diameter	mm	76							
Ribbon <sup>2)</sup>	Ink side		outside or inside							
	Roll diameter	up to mm	80							
	Core diameter	mm	25.4							
	Variable length	up to m	500							
	Width	mm	25 - 67		25 - 114		25 - 114		50 - 170	
	Automatic saving		□		□		□		□	
<b>Printer dimensions and weights</b>										
Width	mm		207		260		260		320	
Height	with roll diameter 205 / 305	mm	400 / 430							
Depth	with roll diameter 205 / 305	mm	400 / 500							
Weight	with roll diameter 205 / 305 approx. kg		15 / 16		16 / 17		16 / 17		20	
<b>Label sensor with position indication</b>										
Gap sensor	for		labels, punch marks or print marks and end of material							
Reflective sensor	reflex from below	for	print marks on non-transparent liner materials and end of material							
Distance of sensor to locating edge	mm		5 - 26		5 - 60		5 - 60		5 - 60	
Material passage	mm		2							
<b>Electronics</b>										
Processor 32 bit clock rate	MHz		800							
Main memory (RAM)	MB		256							
Data memory (IFFS)	MB		50							
Slot to connect a SD memory card (SDHC, SDXC)			■							
Battery for time and date, real-time clock			■							
Data memory when power is switched off (e.g. serial numbering)			■							
<b>Interfaces</b>										
RS232C 1,200 to 230,400 baud/8 bit			■							
USB 2.0 Hi-speed device to connect a PC			■							
Ethernet 10/100 Mbit/s			LPD, IPv4, IPv6, RawIP printing, DHCP, HTTP, FTP, SMTP, SNMP, TIME, NTP, Zeroconf, SOAP web service							
1 x USB host on the operation panel	for		Service Key, USB memory stick, USB WLAN stick, USB Bluetooth adapter							
2 x USB host on the back of the device	for		keyboard, barcode scanner, USB memory stick, warning light, USB WLAN stick, USB WLAN stick with a rod antenna, USB Bluetooth adapter, external operation panel							
Peripheral connection USB host, 24 VDC			■							
Digital I/O interface with 10 inputs and 11 outputs			■							
2-Port Ethernet Switch 10/100 Mbit/s			□							

<sup>1)</sup> Limitations may apply to small labels, thin materials or strong adhesives. Critical applications need to be tested.

<sup>2)</sup> The ribbon should at least correspond with the width of the liner material.



# Technical data

■ standard □ option


Operating data			
Power supply	100-240 VAC, 50/60 Hz, PFC		
Power consumption	Standby < 10 W / typical 150 W / up to 300 W		
Temperature / Operation humidity	Stock	+5 - 40°C / 10 - 85 %, not condensing	
	Transport	0 - 60°C / 20 - 85 %, not condensing	
Approvals	CE, FCC Class A, ICES-3, cULus, CB, CCC		
Operation panel			
Colored LCD touch display	Screen diagonal	"	4.3
	Resolution Width x Height	px	480 x 272
Setup options			
	Print Labels	Region:	- Language
	Ribbon Peel-off		- Country
Apply Interfaces			- Keyboard
	Error	Time	- Time zone
		Display:	- Brightness
			- Power saving mode
			- Orientation
		Interpreter	
Status bar			
	Data reception	Bluetooth	
	Record datastream	WLAN	
	Ribbon pre-warning	Ethernet	
	SD memory card plugged in	USB slave	
	USB memory stick plugged in	Time	
Monitoring			
	Ribbon	Direc. of winding	Pinch roller open
		Pre-warning	
	Labels	Pre-warning	
	End		
	Print head Voltage		
	Temperature open		
Test routines			
System diagnostics	on start-up, including print head detection		
Information display, test printout, analysis	Status printout	Test grid	
	Fonts list	Label profile	
	List of devices	List of events	
	WLAN status	Monitor mode	
	Record print data on memory card		
Status reports	- Printout of device settings, e.g. print lengths and service hours - Device status request by software command - Display of, e.g., network errors, no links, barcode errors, periphery errors, etc.		
Fonts			
Font types provided internally	5 bitmap fonts:	7 vector fonts:	
	12 x 12 dots 16 x 16 dots 16 x 32 dots OCR-A OCR-B	AR Heiti Medium GB-Mono CG Triumvirate Condensed Bold Garuda HanWangHeiLight Monospace 821 Swiss 721 Swiss 721 Bold	
to be stored	TrueType fonts		
Character sets	Windows-1250 to -1257		
	DOS 437, 737, 775, 850, 852, 857, 862, 864, 866, 869 EBCDIC 500 ISO 8859-1 to -10 and -13 to -16 WinOEM 720 UTF-8 MacRoman DEC MCS KOI8-R		
	Western European	Cyrillic	
	Eastern European	Greek	
	Chinese simplified	Latin	
	Chinese traditional	Hebrew	
	Thai	Arabic	

Fonts			
Bitmap fonts	Widths and heights 1 - 3 mm Zoom factors 2 to 10 Orientations 0°, 90°, 180°, 270°		
Vector / TrueType fonts	Widths and heights 0,9 - 128 mm Variable zoom Orientation 360° in steps of 1°		
Font styles	bold, italic, underlined, outline, inverse - depending from the font types		
Character spacing	variable or monospace for fixed character spacings		
Graphics			
Graphic elements	Lines, arrows, rectangles, circles, ellipses - filled or filled with fading		
Graphic formats	PCX, IMG, BMP, TIF, MAC, GIF, PNG		
Barcodes			
Linear	Code 39, Code 93	Interleaved 2/5	
	Code 39 Full ASCII	Ident and routing code of Deutsche Post	
	Code 128 A, B, C	Codabar	
	EAN 8, 13	JAN 8, 13	
	EAN/UCC 128/GS1-128	MSI	
	EAN/UPC Appendix 2	Plessey	
	EAN/UPC Appendix 5	Postnet	
	FIM	RSS 14	
	HIBC	UPC A, E, E0	
2D and stacked	DataMatrix		
	DataMatrix Rectangle Extension		
	QR code		
	Micro QR code		
	GS1 QR code		
	GS1 DataMatrix		
	PDF 417		
	Micro PDF 417		
	UPS MaxiCode		
	GS1 DataBar		
	Aztec		
	Codablock F		
	RSS 14 truncated, limited, stacked, stacked omni-directional		
	All codes are variable in terms of height, modular width and ratio; orientations 0°, 90°, 180°, 270°  check digit, plain text printout and start / stop code are options depending from the type of code		
Software			
Label software	cablabel S3 Lite cablabel S3 Viewer cablabel S3 Pro cablabel S3 Print		■ ■ □ □
Running also with	CODESOFT NiceLabel BarTender		
Stand-alone operation			■
Windows printer drivers WHQL certified for	Windows Vista Windows 7 Windows 8 Windows 8.1 Windows 10	Server 2008 Server 2008 R2 Server 2012 Server 2012 R2 Server 2016 Server 2019	■
Apple Mac OS X printer drivers	from version 10.6		■
Linux printer drivers	from CUPS 1.2		■
Programming	JScript printer language abc Basic Compiler		■ ■
Integration	SAP Database Connector		■ ■
Emulation	ZPL (Datastream to be tested in advance)		□
Administration	Printer control Configuration in Intranet and Internet Network Manager (in preparation)		■ ■ ■

# Label software cablabel S3

## Designing, printing, administrating

cablabel S3 opens up the full potential of cab devices. First of all, the label must be designed. cablabel S3 is of a modular design which makes it adaptable to requirements step by step. To support functions like native JScript programming, elements such as the JScript Viewer are embedded as plug-ins. The designer user interface and the JScript code are synchronized in real time. Special functions like the Database Connector or barcode testers can be integrated.

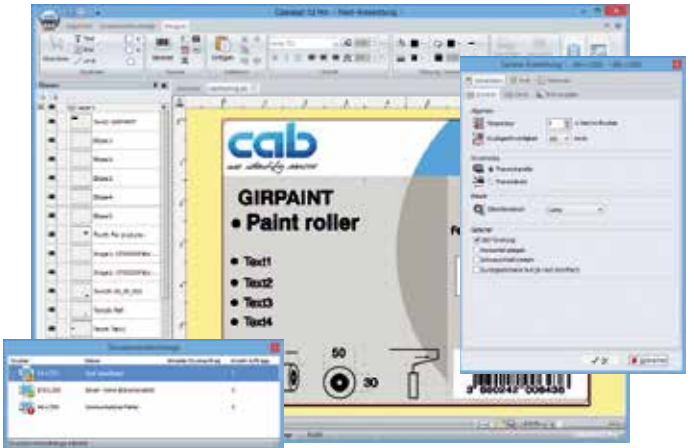

For further information see  
[www.cab.de/en/cablabel](http://www.cab.de/en/cablabel)

## Stand-alone printing

This operating mode is the printer's ability to select and print labels even when it is not connected to a host system.

The label has to be designed with a software such as cablabel S3 or by direct programming with a text editor on a PC. Label formats, texts, graphics as well as database contents are stored on a memory card, a USB memory stick or in the internal IFFS memory.

Only variable data are sent to the printer via a keyboard, a barcode scanner, scales or other host systems and/or recalled by the Database Connector from the host and printed.



## OPC UA

cab printers of the current generation are ready to interact with machines and components of different manufacturers in industrial plants.

An OPC UA server and client is part of the firmware.

The server enables printer configuration and control, while dynamic print data can be prepared via a defined programming interface.

With a client integrated, data fields from other OPC UA-enabled machines can be read and put on the label without the need for an additional software component.



# Printer control

## Drivers

To control the printer with a software other than cablabel S3, cab provides drivers in 32 / 64 bit for operating systems starting from Windows Vista, Mac OS 10.6 and Linux with CUPS 1.2.



### Windows<sup>1)</sup> drivers

cab printer drivers are WHQL-certified. They ensure optimum stability on the Windows operating system.



### Mac OS X<sup>2)</sup> drivers

cab provides CUPS-based printer drivers for Mac OS X applications.



### Linux<sup>3)</sup> drivers

Linux drivers are CUPS-based.

Drivers are offered on the DVD delivered with the printer and for free download at [www.cab.de/en/support](http://www.cab.de/en/support)

## Programming



### JScript

To control the printer, cab has developed the embedded programming language JScript. See manual for free download at [www.cab.de/en/programming](http://www.cab.de/en/programming)



### abc Basic Compiler


In addition to JScript and as an integral part of the firmware, it allows advanced printer programming before data are sent to printout. For example, external printer languages can be replaced without interfering in the current print job. Also data from other systems such as a scale, a barcode scanner or PLC can be integrated.

## Integration



### Printer Vendor Program

As a partner in SAP's<sup>4)</sup> Printer Vendor Program, cab has developed a replace method to enable easy control of a cab printer via SAPScript from SAP R/3. Only variable data are sent to the printer by the host. Pictures and fonts that had priorly been stored in the local memory (IFFS, memory card, etc.) are merged.

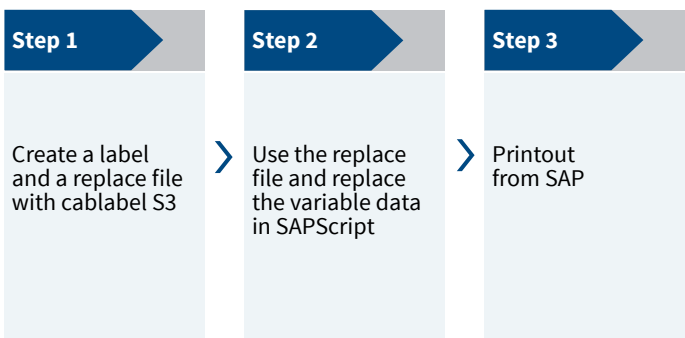

<sup>1)</sup> Windows is a registered trademark of Microsoft Corporation  
<sup>2)</sup> MAC OS X is a registered trademark of Apple Computer, Inc.  
<sup>3)</sup> Only for device series SQUIX (except of SQUIX MT), MACH 4S, EOS, HERMES Q and PX  
<sup>4)</sup> SAP and all corresponding logos are trademarks or registered trademarks of SAP SE

# Printer administration

## Configuration in Intranet and Internet

The HTTP and FTP server integrated in the printer via standard programs like a web browser or FTP clients allows printer control and configuration, firmware updates and memory card administration. Via email or SNMP, the SNMP and SMTP client datagram sends status, warning and error messages to administrators and users. Time and date are synchronized by a time server.



## Network Manager in preparation

It is possible to simultaneously manage several printers within the network. Control, configuration, firmware updates, memory card administration, data synchronization and PIN administration are supported from one single location.



## Database Connector

Printers connected to a network may directly access data from a central ODBC or OLEDB-ready database and print it on a label. While printing, data can be rewritten to the database.



# Applicators



HERMES Q have been designed for automatic printing and labeling in production lines. Various applicators are provided to roll, blow or tamp labels on products or packaging.

- 1 **Long service life**  
Precise and low-wear linear guidance by means of a ball bearing chain.
- 2 **Variable product heights**  
The stroke cylinder allows labeling on different heights. It is available in lengths of 200, 300 and 400 mm as standards. Further lengths can be provided on request.
- 3 **Protective cover**  
The cylinder and the guide are protected by a cover as standard. Covers adapted to the product jig are offered for labeling workstations.
- 4 **High process reliability**  
Supporting air, intake air and stroke speed are all to be set. Monitoring is via sensors.
- 5 **Real-time labeling**  
Applicators transfer small and large labels; Label heights from 4 to 250 mm and label widths from 4 to 174 mm can be processed.




**Pressure reducing valve**  
It reduces the pressure of the stroke cylinder on the product.

- 6 **Applicator, pivoted**  
Quick and easy access to the print mechanics in cases of material replacement or maintenance.

# Overview of applicators and transfer modules

		HERMES Q																	
Applicators		2	4	6.3	Page	11	11	12	61	21	88	32	32	41	51	-	-	90	
		Order code																	
Product marking	Swing applicator	3214	3214		14	-	F	F	F	□	-	-	-	-	-	-	-	-	
	Stroke applicator	4114	4114		15/16	-	F	F	F	□	□	-	-	-	-	-	-	-	
				4116		15/16	-	F	F	F	-	□	-	-	-	-	-	-	
	Stroke turn applicator	4214	4214		17	-	F	F	F	□	-	-	-	-	-	-	-	-	
	Stroke applicator	4414	4414		18	-	F	F	F	-	-	-	-	-	-	-	-	-	
	Swing stroke applicator	4514	4514		19	-	-	-	-	-	□	-	-	-	-	-	-	-	
Flag applicator		4712		20	-	-	-	-	-	-	□	-	-	-	-	-	-		
Package marking	Front side applicator		3014		21	-	□	-	-	□	-	-	□	-	-	-	-	-	
				3016		21	-	□	-	-	-	-	-	□	-	-	-	-	
	Stroke applicator		4014		22/23	□	F	-	-	□	-	□	□	□	□	-	-	-	
				4016		22/23	-	□	-	-	-	-	-	□	□	-	-	-	
	Stroke blow applicator		4614		24	-	-	-	-	□	-	-	-	-	-	-	-	-	
	Demand module		5114		25	-	-	-	-	-	-	-	-	-	-	□	-	-	
	Vacuum belt applicator		5314	5316		26	-	-	-	-	-	-	-	-	-	-	-	□	-
			5414	5416		26	-	-	-	-	-	-	-	-	-	-	-	-	-
Air jet box		6114		27	-	-	-	-	-	-	-	-	-	-	-	-	-	□	

Label transfer with a  
 Universal pad  
 Tamp pad  
 Tamp pad with damping layer  
 Tamp pad with label stop  
 Blow pad  
 Form pad  
 Universal pad spring-mounted  
 Tamp pad spring-mounted  
 Roll-on pad  
 Corner-wrap pad  
 Demand module  
 Vacuum belt  
 Template

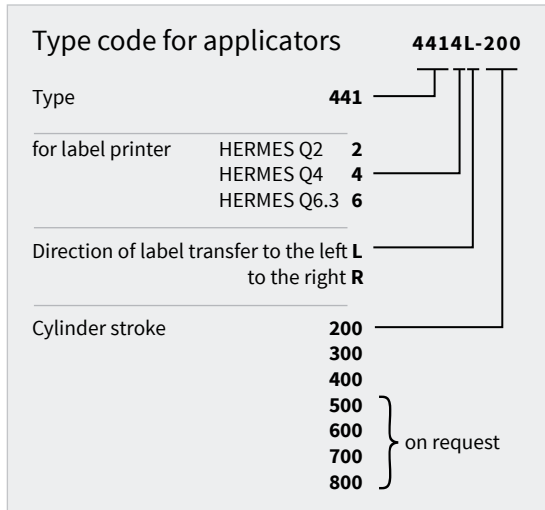

**F** Allows the tamp pad to immerse into the surface within the label area.

For detailed immersion depths see the applicator's technical data.


In case an applicator's immersion depth succeeds 25 mm, the cover of HERMES Q must be adapted.

# Product marking

## Swing applicator 3214

The labels are preferably applied on the side of the product.

The pad is positioned in front of the peel-off plate. The label is held during printing. A rotary cylinder swings in labeling position. The stroke cylinder applies the label on the product. Rotary angle and linear stroke are adjustable.

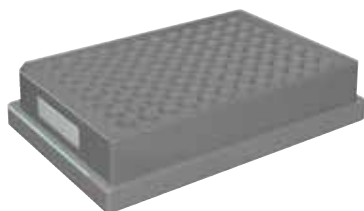

## Accessories

### 5.13 Blow tube

### 5.14 Compressed air regulation unit



### Tamp pad

Labels are precisely tamped on plain surfaces, even recessed.

### Tamp pad with damping layer

With hard surfaces, the layer contributes to noise damping. The use gives also advantage with rough structures or minor unevenness.

### Tamp pad with label stop

In case of small labels, the stop provides precise positioning on the product.

### Blow pad

for pressure sensitive surfaces or when products are in motion. Air jet blows the labels onto the product. 5 to 10 mm distance to the product surface are set with a stop on the stroke cylinder.

4.1



			Tamp pad	Tamp pad with damping layer	Tamp pad with label stop	Blow pad
Technical data			3214 L/R 11 F	3214 L/R 12 F	3214 L/R 61 F	3214 L/R 2100
Label width	HERMES Q2	mm	4 - 58	10 - 58	10 - 58	10 - 58
	HERMES Q4	mm	10 - 114	10 - 114	10 - 114	10 - 80
Label height	HERMES Q2	mm	5 - 80	8 - 80	5 - 80	10 - 80
	HERMES Q4	mm	8 - 80	8 - 80	8 - 80	10 - 80
Product during labeling	not in motion				■	
	in motion		-	-	-	■
Product labeling	from the side				■	
Product height	fixed				■	
Product distance to peel-off plate	mm				250 - 280	
Horizontal linear guidance	mm				5 - 30	
Pivot angle					45° - 95°	
Immersion depth pad F	up to mm		30	30	30	-
Compressed air	bar				4.5	
Cycle time <sup>1)</sup>	approx. labels/min				20	

<sup>1)</sup> Calculated with label height 40 mm, print speed 100 mm/s

# Product marking

## Strike applicators 4114, 4116

for precise real-time labeling of very small to mid-sized labels where installation is difficult. Labeling is possible from all sides.

The pad is positioned in front of the peel-off plate. The label is held during printing. A short stroke cylinder moves the pad horizontally to the labeling position. The stroke cylinder applies the label on the product. The length of the stroke cylinder defines the maximum product distance to the peel-off plate.



### Accessories

#### 5.13 Blow tube

#### 5.14 Compressed air regulation unit

#### 5.17 Pressure reducing valve



4.2



### Tamp pad

Labels are precisely tamped on plain surfaces, even recessed.

### Tamp pad with damping layer

With hard surfaces, the layer contributes to noise damping. The use gives also advantage with rough structures or minor unevenness.

### Tamp pad with label stop

In case of small labels, the stop provides precise positioning on the product.

### Blow pad

for pressure sensitive surfaces or when products are in motion. Air jet blows the labels onto the product. 5 to 10 mm distance to the product surface are set with a stop on the stroke cylinder.

			Tamp pad	Tamp pad with damping layer	Tamp pad with label stop	Blow pad
Technical data			4114, 4116 L/R 11 F	4114, 4116 L/R 12 F	4114, 4116 L/R 61 F	4114 L/R 2100
Label width	HERMES Q2	mm	4 - 58	10 - 58	10 - 58	10 - 58
	HERMES Q4	mm	10 - 114	10 - 114	10 - 114	10 - 114
	HERMES Q6.3	mm	50 - 174	50 - 174	50 - 174	-
Label height	HERMES Q2	mm	4 - 80	8 - 80	4 - 80	10 - 80
	HERMES Q4	mm	8 - 80	8 - 80	8 - 80	10 - 80
	HERMES Q6.3	mm	8 - 80	8 - 80	8 - 80	-
Product during labeling	not in motion				■	
	in motion		-	-	-	■
Product labeling	from top				■	
	from below				■	
	from the side				■	
Product height	fixed		-	-	-	■
	variable		■	■	■	-
Horizontal short stroke cylinder	mm		10			
Product distance to lower edge of device	at cylinder stroke 200	up to mm	135	135	135	140
	300	up to mm	235	235	235	240
	400	up to mm	335	335	335	340
Immersion depth pad F <sup>1)</sup>	up to mm	110	110	110	-	
Compressed air	bar		4.5			
Cycle time <sup>2)</sup>	approx. labels/min		30			

<sup>1)</sup> In case the applicator's immersion depth is more than 25 mm, the cover of HERMES Q has to be adapted.


<sup>2)</sup> Calculated with stroke 100 mm below device, label height 40 mm, print speed 100 mm/s

# Product marking

## Stroke applicators 4114, 4116

for precise real-time labeling of very small to mid-sized labels where installation is difficult. Labeling is possible from all sides.

The pad is positioned in front of the peel-off plate. The label is held during printing. A short stroke cylinder moves the pad horizontally to the labeling position. The stroke cylinder applies the label on the product. The length of the stroke cylinder defines the maximum product distance to the peel-off plate.

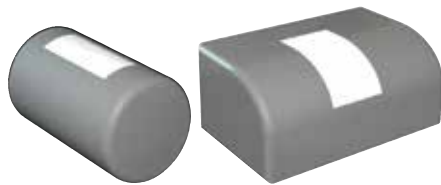

### Accessories

5.13 **Blow tube**

5.14 **Compressed air regulation unit**

5.17 **Pressure reducing valve**

4.2



### Form pad

Labels are applied precisely to cylindrical objects, oblique or curved surfaces. Curved form pads prevent from bubbling on very smooth and flat surfaces. With cylindrical objects, 200° maximum label wrapping is possible.

Technical data			Form pad
			4114, 4116 L/R 8800
Label width	HERMES Q2	mm	10 - 58
	HERMES Q4	mm	10 - 114
	HERMES Q6.3	mm	50 - 174
Label height		mm	8 - 80
Product during labeling	not in motion		■
Product labeling	from top		■
	from below		■
	from the side		■
Product height	variable		■
Horizontal short stroke cylinder	mm		10
Product distance to lower edge of device			
at cylinder stroke 200	up to mm		135
	300	up to mm	235
	400	up to mm	335
Compressed air		bar	4.5
Cycle time <sup>1)</sup>	approx. labels/min		20

<sup>1)</sup> Calculated with stroke 100 mm below the device, label height 40 mm, print speed 100 mm/s  
In case the height of the form pad is more than 25 mm, the cover of HERMES Q has to be adapted.



# Product marking

## Stroke turn applicator 4214

for precise real-time labeling of very small to mid-sized labels where installation is difficult. Labeling is possible from all sides.

The pad is positioned in front of the peel-off plate. The label is held during printing. A rotary cylinder swings the pad horizontally up to 180° in labeling position. The stroke cylinder applies the label on the product. The length of the stroke cylinder defines the maximum product distance to the peel-off plate.



### Accessories

- 5.13 **Blow tube**
- 5.14 **Compressed air regulation unit**
- 5.17 **Pressure reducing valve**



#### Tamp pad

Labels are precisely tamped on plain surfaces, even recessed.

#### Tamp pad with damping layer

With hard surfaces, the layer contributes to noise damping. The use gives also advantage with rough structures or minor unevenness.

#### Blow pad

for pressure sensitive surfaces or when products are in motion. Air jet blows the labels onto the product. 5 to 10 mm distance to the product surface are set with a stop on the stroke cylinder.

#### Tamp pad with label stop

In case of small labels, the stop provides precise positioning on the product.

			Tamp pad	Tamp pad with damping layer	Tamp pad with label stop	Blow pad
Technical data			4214 L/R 11 F	4214 L/R 12 F	4214 L/R 61 F	4214 L/R 2100
Label width	HERMES Q2	mm	4 - 58	10 - 58	10 - 58	10 - 58
	HERMES Q4	mm	10 - 80			
Label height	HERMES Q2	mm	4 - 40	8 - 40	4 - 40	10 - 40
	HERMES Q4	mm	8 - 40	8 - 40	8 - 40	10 - 40
Product during labeling	not in motion				■	
	in motion		-	-	-	■
Product labeling	from top				■	
	from below				■	
	from the side				■	
Product height	fixed		-	-	-	■
	variable		■	■	■	-
Horizontal rotary angle	90°, 0°				■	
Product distance to lower edge of device at cylinder stroke	200	up to mm	135	135	135	140
	300	up to mm	235	235	235	240
	400	up to mm	335	335	335	340
	Immersion depth pad F <sup>1)</sup>	up to mm	65	65	65	-
Compressed air	bar				4.5	
Cycle time <sup>2)</sup>	approx. labels/min				20	

<sup>1)</sup> In case the applicator's immersion depth is more than 25 mm, the cover of HERMES Q has to be adapted.

<sup>2)</sup> Calculated with stroke 100 mm below device, label height 40 mm, print speed 100 mm/s

# Product marking

## Stroke applicator 4414

for very precise real-time labeling of very small to mid-sized labels. Adjustability in x and y directions provides exact positioning on the product. Labeling is possible from all sides.

The pad is positioned in front of the peel-off plate. The label is held during printing. Two short stroke cylinders move the pad horizontally to the labeling position. The stroke cylinder applies the label on the product. The length of the stroke cylinder defines the maximum product distance to the peel-off plate.



### Accessories

5.13 **Blow tube**

5.14 **Compressed air regulation unit**

5.17 **Pressure reducing valve**



### Tamp pad

Labels are precisely tamped on plain surfaces, even recessed.

4.4



### Tamp pad with damping layer

With hard surfaces, the layer contributes to noise damping. The use gives also advantage with rough structures or minor unevenness.

### Tamp pad with label stop

In case of small labels, the stop provides precise positioning on the product.

			Tamp pad	Tamp pad with damping layer	Tamp pad with label stop
			4414 L/R 11 F	4414 L/R 12 F	4414 L/R 61 F
<b>Technical data</b>					
Label width	HERMES Q2	mm	4 - 58	10 - 58	10 - 58
	HERMES Q4	mm		10 - 114	
Label height	HERMES Q2	mm	4 - 80	8 - 80	4 - 80
	HERMES Q4	mm		8 - 80	
Product during labeling	not in motion			■	
Product labeling	from top			■	
	from below			■	
	from the side			■	
Product height	variable			■	
Horizontal short stroke cylinder	x direction	mm		3 - 7	
	y direction	mm		11 - 15	
Product distance to lower edge of device					
at cylinder stroke 200	up to	mm		135	
	300	up to		235	
	400	up to		335	
Immersion depth pad F <sup>1)</sup>	up to	mm		90	
Compressed air		bar		4.5	
Cycle time <sup>2)</sup>	approx. labels/min			25	

<sup>1)</sup> In case the applicator's immersion depth is more than 25 mm, the cover of HERMES Q has to be adapted.

<sup>2)</sup> Calculated with stroke 100 mm below device, label height 40 mm, print speed 100 mm/s

# Product marking

## Swing stroke applicator 4514

for real-time labeling on inner surfaces of profiles and pipes.  
The exact position on the product is set with a stop on the stroke cylinder. Labeling is possible from all sides.

The pad is positioned in front of the peel-off plate. The label is held during printing. A rotary cylinder swings the pad to the labeling plane. The stroke cylinder moves the label to the demand position.



### Accessories

#### 5.13 Blow tube

#### 5.14 Compressed air regulation unit

4.5



#### Blow pad

With 5 to 10 mm distance to the product surface, air jet blows the labels onto the product.

Technical data			Blow pad 4514 L/R 2100
Label width	HERMES Q2	mm	10 - 58
	HERMES Q4	mm	10 - 80
Label height		mm	10 - 60
Product during labeling	not in motion		■
Product labeling	from top		■
	from below		■
	from the side		■
Product height	fixed		■
Vertical pivot angle			120°
Distance lower edge of device to upper edge of label at cylinder stroke	200	up to mm	150 <sup>2)</sup>
	300	up to mm	250 <sup>2)</sup>
	400	up to mm	350 <sup>2)</sup>
Compressed air		bar	4.5
Cycle time <sup>1)</sup>	approx. labels/min		20

<sup>1)</sup> Calculated with stroke 100 mm below device, label height 40 mm, print speed 100 mm/s


<sup>2)</sup> depending on the label height

# Product marking

## Flag applicator 4712

for precise real-time labeling on round materials such as cables, hoses, pipes, etc. Labeling is possible from all sides.

The pad is positioned in front of the peel-off plate. The label is held during printing. It is moved by a stroke cylinder to the demand position. With the other cylinder, the label is guided around the round material via cam control. At first, it is precisely stuck at the ends and only then pressed to the round material. The length of the stroke cylinder defines the maximum product distance to the peel-off plate.

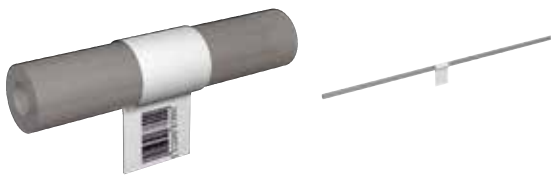



4.6



## Accessories

### 5.13 Blow tube

### 5.14 Compressed air regulation unit

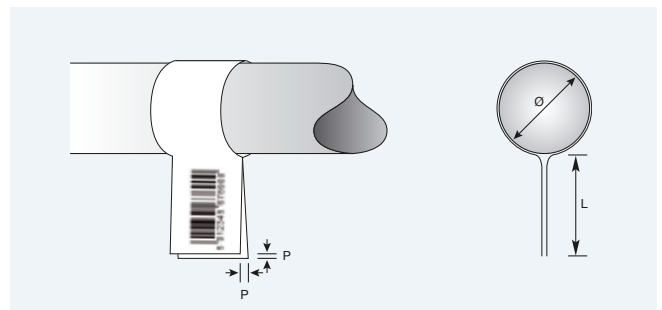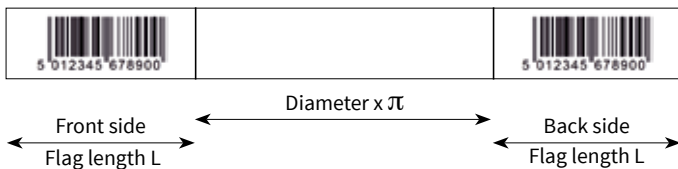

Technical data		Form pad
		4712 L 300
Label width HERMES Q4	mm	60 - 100
Label height	mm	10 - 50
Diameter	mm	3 - 16
Product during labeling	not in motion	■
Product labeling	from top	■
	from below	■
	vertically rotated from the side	0 - 180° clockwise; others on request
Product height	fixed	■
Product distance to lower edge of device min. mm	at cylinder stroke 300	70
	up to mm	260
Immersion depth tongs	mm	55
Offset P	up to mm	1.0 <sup>2)</sup>
Compressed air	bar	4.5
Cycle time <sup>1)</sup>	approx. labels/min	15

<sup>1)</sup> Calculated with print speed 100 mm/s



<sup>2)</sup> depending on the label quality

# Package marking

## Front side applicators 3014, 3016

for real-time labeling on packaging in motion.  
The labels are preferably applied to the front or back.  
Labeling from top or from the side is possible.

The pad is positioned in front of the peel-off plate. The label is held during printing. The rotary cylinder applies the label on the packaging. A sensor detects the packaging and, when labeling has finished, moves back the pivot arm and pad to their initial position.

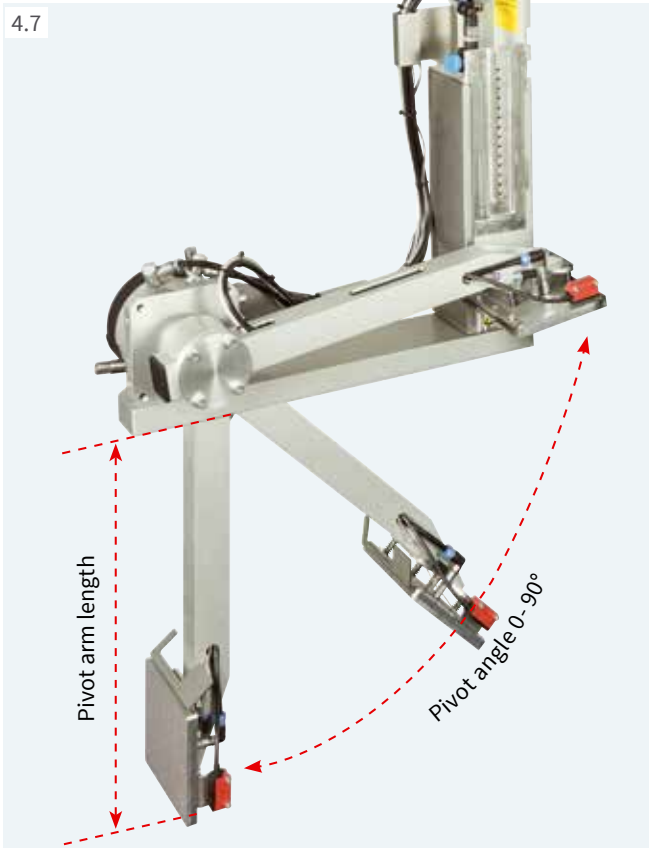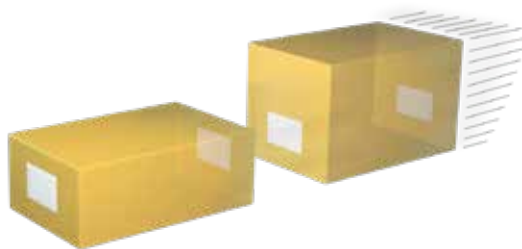

### Accessories

5.13 **Blow tube**

5.14 **Compressed air regulation unit**



#### Tamp pad

Labels are precisely tamped on plain surfaces, even recessed.



#### Tamp pad spring-mounted

The spring-mounted suction plate allows labeling on inclined surfaces up to 15°. Deviation in height in the area of the label may not exceed 10 mm.



#### Blow pad

With 5 to 10 mm distance to the product surface, air jet blows the labels onto the product.

Technical data		Tamp pad		Tamp pad spring-mounted		Blow pad	
		3014, 3016 L/R 1100		3014, 3016 L/R 3100		3014 L/R 2100	
Label width	HERMES Q4	mm	25 - 114	80 - 114	25 - 114		
	HERMES Q6.3	mm	25 - 174	80 - 174	-		
Label height	HERMES Q4	mm	8 - 250	80 - 250	10 - 100		
	HERMES Q6.3	mm	25 - 250	80 - 250	25 - 100		
Product during labeling	not in motion			■			
	in motion			■			
Product labeling	from top			■			
	from the side			■			
	from the front			■			
	from the back			■			
Product height	variable			■			
Pivot arm length <sup>1)</sup>	mm			200 / 300 / 400			
Pivot angle				0 - 90°			
Compressed air	bar			4.5			
Cycle time <sup>2)</sup>	approx. labels/min			15			

<sup>1)</sup> Pivot arm length is defined as the accessible 90° label position (lower edge of the label) below the footprint of HERMES Q.

<sup>2)</sup> Calculated with pivot arm length 200 mm, label height 100 mm, print speed 100 mm/s

# Package marking

## Stroke applicators 4014, 4016

for real-time labeling on packaging or products. Depending on the type of pad, the product is either in motion or not in motion during labeling. Labeling is possible from all sides.

The pad is positioned in front of the peel-off plate. The label is held during printing. The stroke cylinder applies the label on the product. A sensor detects the product and moves back the pad to its initial position. The length of the stroke cylinder defines the maximum product distance to the peel-off plate.



## Accessories

5.13 **Blow tube**

5.14 **Compressed air regulation unit**

5.17 **Pressure reducing valve**

4.8



### Tamp pad

Labels are precisely tamped on plain surfaces, even recessed.

### Universal pad

Labels are tamped on plain surfaces. Holes to suck the labels are pre-drilled in gaps of 5 mm and are covered by a sliding foil. They are opened with a punching tool, according to the label size. Delivery includes two foils for substitution.

### Tamp pad spring-mounted

The spring-mounted suction plate allows labeling on inclined surfaces up to 15°. Deviation in height in the area of the label may not exceed 10 mm.

### Universal pad spring-mounted

The spring-mounted suction plate allows labeling on inclined surfaces up to 15°. Deviation in height in the area of the label may not exceed 10 mm. Holes to suck the labels are pre-drilled in gaps of 5 mm and are covered by a sliding foil. Delivery includes two foils for substitution.

			Tamp pad	Universal pad	Tamp pad spring-mounted	Universal pad spring-mounted
Technical data			4014, 4016 L/R 11 F	4014 L/R 1100	4014, 4016 L/R 3100	4014 L/R 3100
Label width	HERMES Q4	mm	20 - 114	75 / 90	80 - 114	116 / 116
	HERMES Q6.3	mm	50 - 174	-	80 - 174	-
Label height	HERMES Q4	mm	20 - 210	60 / 90	80 - 210	102 / 152
	HERMES Q6.3	mm	25 - 210	-	80 - 210	-
Product during labeling	not in motion				■	
Product labeling	from top				■	
	from below				■	
	from the side				■	
Product height	variable				■	
Product distance to lower edge of device at cylinder stroke 200	up to mm		135	135	130	130
	300	up to mm	235	235	230	230
	400	up to mm	335	335	330	330
Immersion depth pad F <sup>1)</sup>	up to mm	120	-	-	-	
Compressed air	bar			4.5		
Cycle time <sup>2)</sup>	approx. labels/min			25		

<sup>1)</sup> In case the applicator's immersion depth is more than 25 mm, the cover of HERMES Q has to be adapted.

<sup>2)</sup> Calculated with stroke 100 mm below device, label height 100 mm, print speed 100 mm/s

# Package marking

## Stroke applicators 4014, 4016

for real-time labeling on packaging or products. Depending on the type of pad, the product is either in motion or not in motion during labeling. Labeling is possible from all sides.

The pad is positioned in front of the peel-off plate. The label is held during printing. The stroke cylinder applies the label on the product. A sensor detects the product and moves back the pad to its initial position. The length of the stroke cylinder defines the maximum product distance to the peel-off plate.

4.8



## Accessories

### 5.13 Blow tube


### 5.14 Compressed air regulation unit

### 5.17 Pressure reducing valve



### Blow pad

for pressure sensitive surfaces or when products are in motion. Air jet blows the labels onto the product. 5 to 10 mm distance to the product surface are set with a stop on the stroke cylinder.

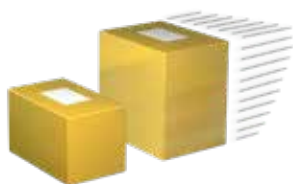


### Roll-on pad

Labels are rolled on plain surfaces of the product during transport.



### Corner-wrap pad

Labels are attached on two adjacent sides of the product. Half of the label is applied by the pad on the top side. Then the second half of the label is rolled on.

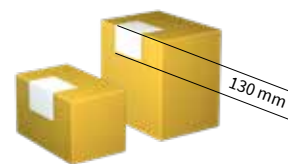

Technical data			Blow pad	Roll-on pad	Corner-wrap pad
			4014 L/R 2100	4014, 4016 L/R 4100	4014 L/R 5100
Label width	HERMES Q4	mm	20 - 114	25 - 114	20 - 114
	HERMES Q6.3	mm	on request	50 - 174	-
Label height	HERMES Q4	mm	20 - 100	80 - 250	60 - 210
	HERMES Q6.3	mm	on request	80 - 250	-
Product during labeling	not in motion		■	-	■
	in motion		■	■	-
Product labeling	from top			■	
	from below		■	■	-
	from the side		■	■	-
Product height	fixed		■	-	-
	variable		-	■	■
Product distance to lower edge of device	at cylinder stroke 200	up to mm	140	160	100
	300	up to mm	240	260	200
	400	up to mm	340	360	300
Compressed air		bar		4.5	
Cycle time <sup>1)</sup>	approx. labels/min		25	20	20


<sup>1)</sup> Calculated with stroke 100 mm below device, label height 100 mm, print speed 100 mm/s

# Package marking

## Stroke blow applicator 4614

for real-time labeling of packaging of different heights in motion. Labeling is possible from all sides.

The pad is positioned in front of the peel-off plate. The label is held during printing. Sensor controlled, the stroke cylinder moves the pad to a position approximately 10 mm above the packaging. The length of the stroke cylinder defines the maximum differences in height of the packages.

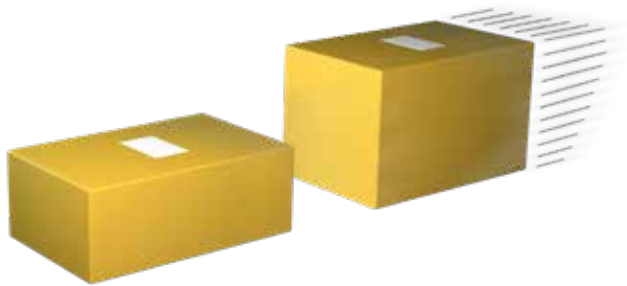

### Accessories

5.13 **Blow tube**

5.14 **Compressed air regulation unit**

4.9



### Blow pad

With 5 to 10 mm distance to the product surface, air jet blows the labels onto the product.

Technical data			Blow pad 4614 L/R 2100
Label width	HERMES Q4	mm	20 - 114
	HERMES Q6.3	mm	on request
Label height	HERMES Q4	mm	20 - 100
	HERMES Q6.3	mm	on request
Product during labeling	not in motion		■
	in motion		■
Product labeling	from top		■
	from below		■
	from the side		■
Product height	fixed		■
	variable		■
Product distance to lower edge of device at cylinder stroke	200	up to mm	140
	300	up to mm	240
	400	up to mm	340
Compressed air		bar	4.5
Cycle time <sup>1)</sup>		approx. labels/min	25

<sup>1)</sup> Calculated with cylinder stroke 100 mm below device, label height 100 mm, print speed 100 mm/s




# Package marking

## Demand module 5114

for serial labeling of packaging in motion. The label position on the peel-off tongue is adjusted with the adjustable rewind assist roller. Labeling is possible from all sides.

During labeling, the next label is printed simultaneously. The conveyor belt speed has to be adapted to the print speed.

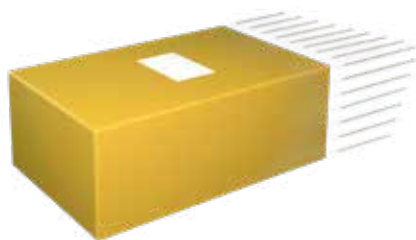

Technical data		Demand module	
		5114 L/R	
Label width HERMES Q4	mm	25 - 114	
Label height	mm	25 - 250	
Print line distance to peel-off plate	mm	400 - 600	
Product during labeling	in motion	■	
Product labeling	from top	■	
	from below	■	
	from the side	■	
Product height	fixed	■	
Product distance to lower edge of device	mm	80	
Product speed	mm/s	must correspond to the print speed / 50 - 250 in steps of 25	
Cycle time <sup>1)</sup>	approx. labels/min	60	



<sup>1)</sup> Calculated with label height 100 mm, print speed 100 mm/s

# Package marking

## Vacuum belt applicators 5314, 5316, 5414, 5416

for real-time labeling on packaging or products in motion. Labeling is possible from all sides on plain surfaces, cylinders resp. corner-wrap.

The vacuum belt applicator is positioned in front of the peel-off plate. The printed label is transferred by the vacuum conveyor belt to the demand position and labeled on the packaging by an external signal.

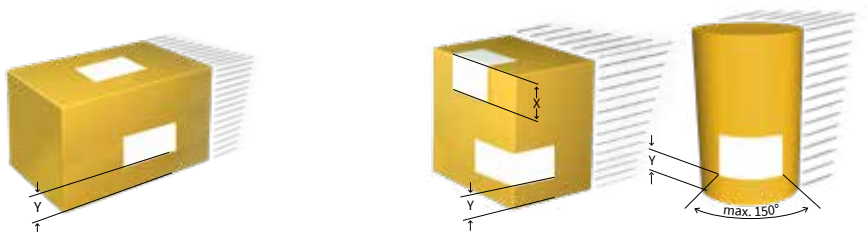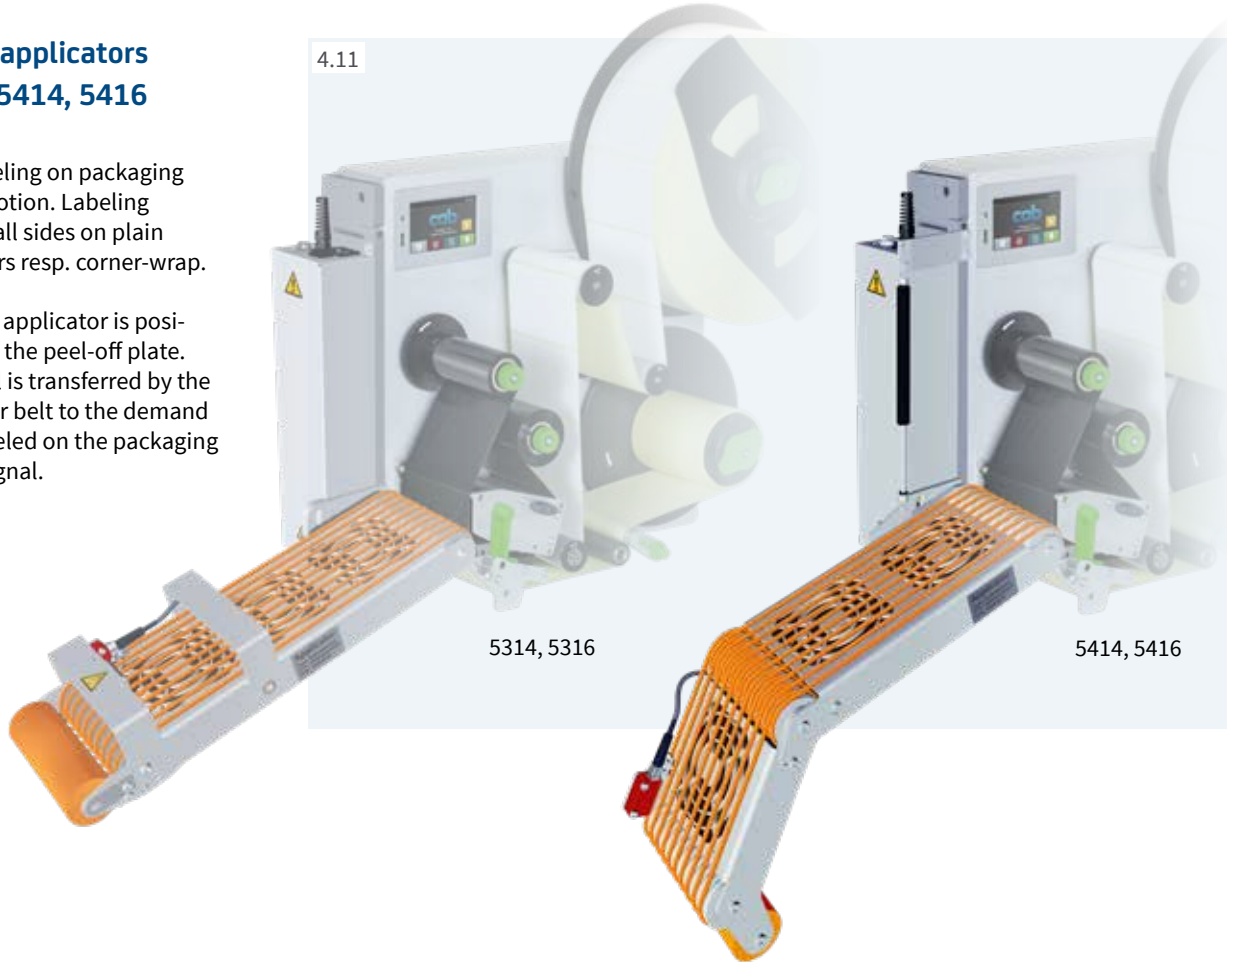

		Vacuum belt applicator			
Technical data		5314-3	5316-3	5414-3	5416-3
Labeling		on the surface		on the surface, a cylinder or corner-wrap	
Direction of label demand		left and right			
Label width	HERMES Q4	20 - 114	-	20 - 114	-
	HERMES Q6.3	-	46 - 174	-	46 - 174
Label height	mm	60 - 356	60 - 356	80 - 356	80 - 356
Product during labeling	in motion			■	
Product labeling	from top			■	
	from below	■	■	-	-
	from the side			■	
Product height	fixed		■		■
	variable		-		■
Product speed	up to m/s	0.5	0.5	0.3	0.3
Gap between products	min. m	0.5			
Stability on application level		-	-	F <sup>1)</sup> = 30 N	F <sup>1)</sup> = 30 N
Corner-wrap labeling	up to mm	-	-	dimension X = 160	dimension X = 160
Vacuum conveyor belt speed <sup>2)</sup>	mm/s	50 - 500			
Cycle time <sup>3)</sup>	up to labels/min	30	30	15	15
Label distance to conveyor belt when labeling from the side	mm	dimension Y = 20			

<sup>1)</sup> F = force required to swing the vacuum conveyor belt

<sup>2)</sup> The product speed must be higher than the vacuum conveyor belt speed.

<sup>3)</sup> Calculated with label height 100 mm, print speed 250 mm/s

# Package marking

## Air jet box 6114

for fast labeling in motion or not in motion. The labels are sucked by a fan and blown off by a powerful blast of air through aligned nozzles. The maximum distance from the packaging to the peel-off plate is 200 mm, depending on the label size.

### Accessories

#### 5.13 Blow tube


#### 5.16 Compressed air regulation unit with shut-off valve for fully venting the hose lines after the compressed air regulation unit; provided as left hand or right hand versions



#### 1 Template

to cover the suction and air jet holes around the label

It is pre-scored in a hole pattern of 8 x 8 mm and can be easily adapted to the label size. By sliding in between the suction block and the slide bars, the area around the label is covered. Five templates are included in the scope of delivery.

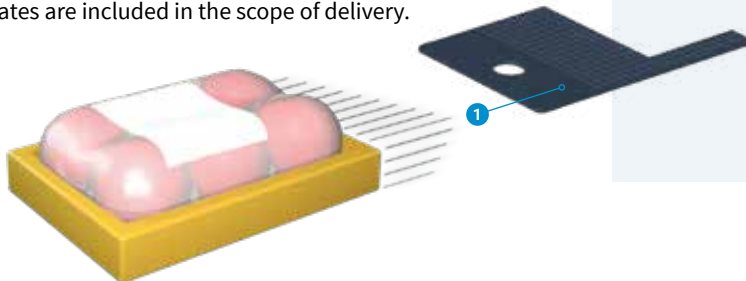

4.12



Technical data		Air jet box 6114 L/R	
Label width HERMES Q4	mm	50-114	smaller sizes on request
Label height	mm	50-125	smaller sizes on request
Product during labeling	not in motion	■	
	in motion	■	
Product labeling	from top	■	
	from below	■	
	from the side	■	
Product height	variable	■	
Product distance to peel-off plate	up to mm	200	
Compressed air	bar	4.5 - 6	
Cycle time <sup>1)</sup>	up to labels/min	100	

<sup>1)</sup> Calculated with label height 50 mm, print speed 250 mm/s, blowing time 100 ms and a distance of 100 mm from the product to the peel-off plate


























# Overview of accessories

■ standard □ option

Pos.	HERMES Q accessories	1.1	1.2	1.3
		HERMES Q2	HERMES Q4	HERMES Q6.3
2.1	SD memory card 8 GB	□	□	□
2.2	USB memory stick 8 GB	□	□	□
2.3	USB WLAN sticks	□	□	□
2.4				
2.5	USB Bluetooth adapter	□	□	□
2.6	Product sensor, 3 pin	-	□	-
2.7	Product sensor, 25 pin	□	□	□
2.8	2-Port Ethernet Switch 10/100 Mbit/s	□	□	□
2.9	I/O interface connector SUB-D, 25 pin	□	□	□
2.10	Warning light (in preparation)	□	□	□
2.11	Print rollers DRS	□	□	□
2.12	Antistatic brush	□	□	-
2.13	Margin stop	□	□	□
2.14	External operation panel	□	□	□
	Connecting cable USB	□	□	□
2.15	Label selection - I/O box	□	□	□
2.16	Hand switch TR2	□	□	□
2.17	Foot switch	□	□	□
2.18	Connecting cable RS232 C	□	□	□
2.19	Barcode tester CC200	□	□	□
<b>Options (assembly ex factory)</b>				
3.1	Cover	□	□	□
3.2	Extended peel-off plate +10 mm	□	□	□
<b>Assembly aids</b>				
6.1	Adapter plate	□	□	□
6.2	Profiles 40, 80, 120 mm	□	□	□
6.3	Base plate 500 x 255 mm	□	□	-
6.4	Mounting plate	□	□	□
6.5	Bracket	□	□	□
6.6	Clamped joint for profile 50 x 50 mm	□	□	□
6.7	Flanged joint for profile 50 x 50 mm	□	□	□
6.8	Floor stand 1601	□	□	□
6.9	Floor stand 1602	□	□	□

Pos.	Applicator accessories	4.1	4.2	4.3	4.4	4.5	4.6	4.7	4.8	4.9	4.12
		3214	4114 4116	4214	4414	4514	4712	3014 3016	4014 4016	4614	6114
5.13	Blow tube	■	■	■	■	■	■	■	■	■	■
5.14	Compr. air regulation unit	□	□	□	□	□	□	□	□	□	□
5.16	Compr. air regulation unit with shut-off valve	-	-	-	-	-	-	-	-	-	■
5.17	Pressure reducing valve	-	□	□	□	-	-	-	□	-	-

# HERMES Q accessories

2.1		<b>SD memory card 8 GB</b>		2.11		<b>Print rollers DRS</b> Coating: silicone They have an extra long service life at a higher imprint tolerance.
2.2		<b>USB memory stick 8 GB</b>		2.12		<b>Antistatic brush</b> Particularly with plastic materials the electrostatic charge is discharged after printing.
2.3		<b>USB WLAN stick</b> 2.4 GHz 802.11b/g/n Hotspot or Infrastructure Mode		2.13		<b>Margin stop</b> to guide 10 to 24 mm wide label rolls
2.4		<b>USB WLAN stick with a rod antenna</b> for extended reach 2.4 GHz 802.11b/g/n + 5 GHz 802.11a/n/ac Hotspot or Infrastructure Mode		2.14		<b>External operation panel</b> If the operation panel is not accessible after printer installation, an external one can be additionally connected.
2.5		<b>USB Bluetooth adapter</b>		    	<b>Connecting cable USB</b> , length 1.8 m	
2.6		<b>Product sensor, 3 pin</b> to connect a front side applicator, vacuum belt applicator or air jet box. In case a product has been detached, e.g. on a conveyor belt, labeling is started.			<b>Connecting cable USB</b> , length 3 m	
2.7		<b>Product sensor, 25 pin</b> In case a product has been detached, e.g. on a conveyor belt, labeling is started.			<b>Connecting cable USB</b> , length 5 m	
2.8		<b>2-Port Ethernet Switch 10/100 Mbit/s</b>			<b>Connecting cable USB</b> , length 11 m	
2.9		<b>I/O interface connector SUB-D, 25 pin</b> with clamping screws to connect all control signals to the I/O interface			<b>Connecting cable USB</b> , length 16 m	
2.10		<b>Warning light</b> in preparation In addition to the display, it indicates the printer status.  <b>Red</b> Collective error <b>Yellow</b> Pre-warning to labels and ribbon ending <b>Green</b> Device ready  Delivery includes a connecting cable and material to assemble to the chassis or a bracket.  USB connection to HERMES Q Connecting cable, length 1 m  ① Assembly to the chassis ② Assembly to the bracket		2.15		<b>Label selection - I/O box</b> Up to 16 different labels can be selected from a memory card by a master control, e.g. PLC.
				2.16		<b>Hand switch TR2</b> on the I/O interface
				2.17		<b>Foot switch</b> on the I/O interface
				2.18		<b>Connecting cable RS232 C</b> 9/9 pin, length 3 m
				2.19		<b>Barcode tester CC200</b> on request
<b>Options (assembly ex factory)</b>						
				3.1		<b>Cover</b> suitable for label roll outside diameters up to 205 mm. It protects from dirt and contact. In case the applicators's immersion depth succeeds 25 mm, the cover must be adapted.
				3.2		<b>Extended peel-off plate</b> in case labels are hard to remove

# HERMES Q assembly aids



**Mounting foot**  
 to install HERMES Q on a desk or in a production line;  
 provided as left hand and right hand versions  
 The size of the mounting foot can be adapted to the application.


- 1 Adapter plate**  
 The labeling system is assembled to the adapter plate.  
 It may also be assembled with the adapter plate to the profile directly in the production line.
- 2 Profile**  
 Aluminum square profile, standard lengths are 40, 80, 120 mm;  
 customized lengths are possible
- 3 Base plate**  
 to assemble the product holder; standard size is 500 x 255 mm




**Mounting plate**  
 to assemble HERMES Q directly in a production line



**Bracket**  
 to assemble HERMES Q to a floor stand

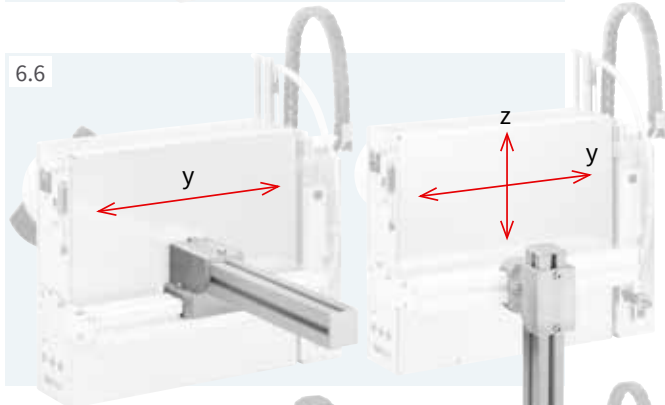


**Clamped joint for profile 50 x 50 mm**  
 to move the labeling system horizontally and vertically

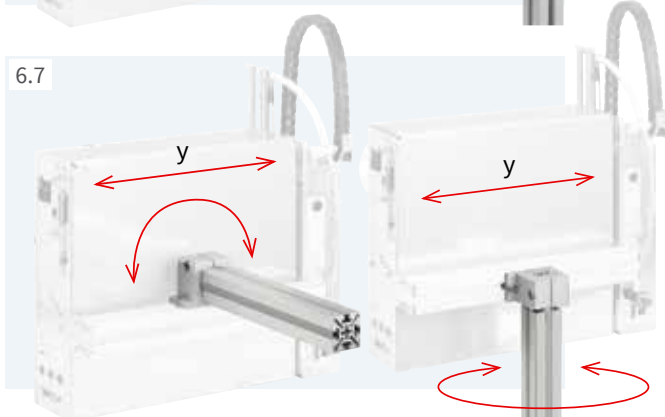

**Flanged joint for profile 50 x 50 mm**  
 to move the labeling system horizontally or rotate around an axis

# HERMES Q floor stands


To install HERMES Q in a production line. With the help of adjustment options, it can be set in three axes to the product that has to be labeled. Pivoting is also possible.

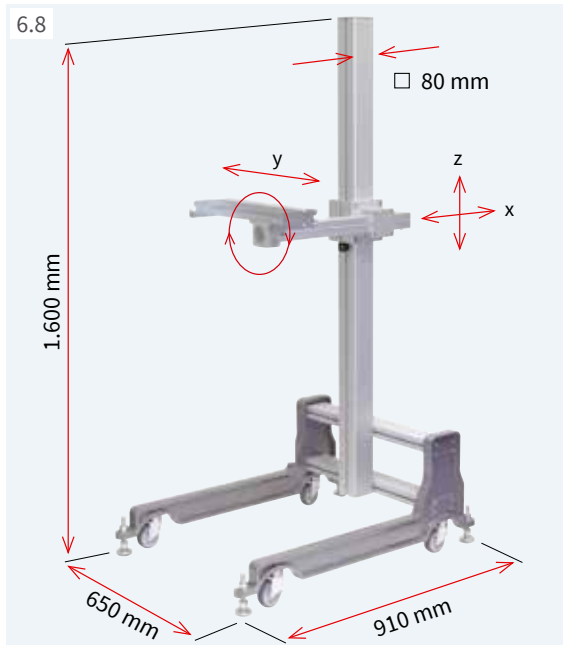

### Floor stand 1601

Preferred use is with applications in different production lines. The mobile floor stand can be aligned with adjustable feet at the place of application.

		Floor stand
		1601
Technical data		
Base frame		Castors, adjustable feet
Height and depth setting		Screw clamping
Load in case of 500 mm offset	up to kg	50
Weight	kg	36

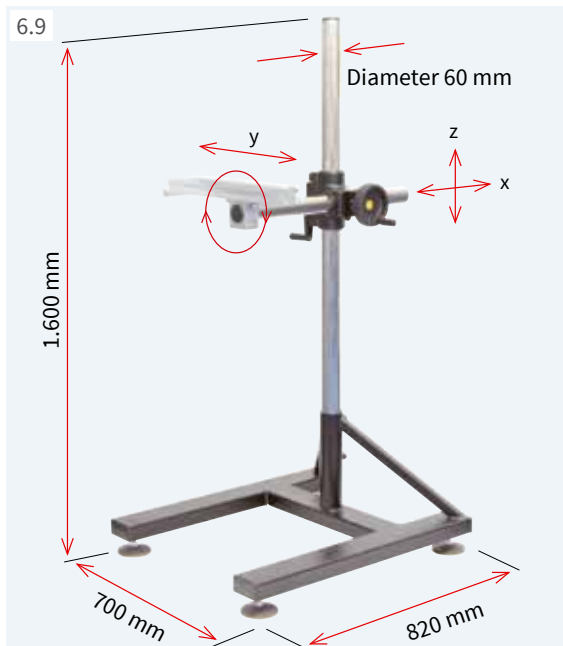

### Floor stand 1602

Preferred use is with applications in which the heights and depths of the labeling position have to be changed frequently. With the help of the toothed rack construction, HERMES Q can be set in directions x and z to the product.

		Floor stand
		1602
Technical data		
Base frame		Adjustable feet
Height setting		Toothed rack / crank
Depth setting		Toothed rack / handwheel
Load in case of 500 mm offset	up to kg	50
Weight	kg	38





## Examples of how to assemble to a stand

Labeling in direction of transport from top

from the side

Labeling crosswise the direction of transport from top

from the side

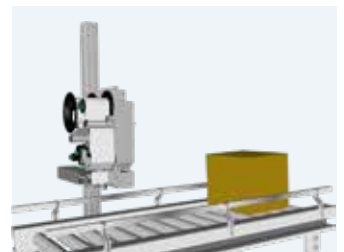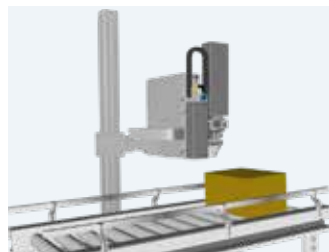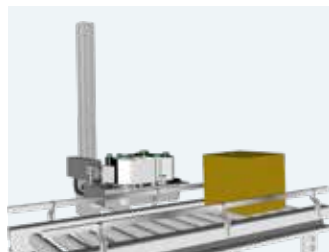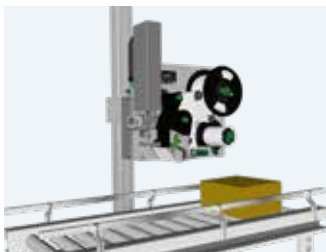

## Applicator accessories

5.13



### Blow tube

supporting air. To assist the label transfer, the label is blown from below to the pad.

Provided for 2", 4" or 6" label applications

5.14



### Compressed air regulation unit

for compressed air preparation; 4.5 bar default setting

Provided as left hand or right hand version

Delivery includes a fine filter, pressure control valve, pressure display, a hose to be connected to the applicator's compressed air input and material to assemble to the chassis or bracket.

5.17




### Pressure reducing valve

to reduce the pressure of the stroke cylinder contacting the product

For applicators 4014/4016, 4114/4116, 4214, 4414

## Examples of how to assemble a compressed air regulation unit

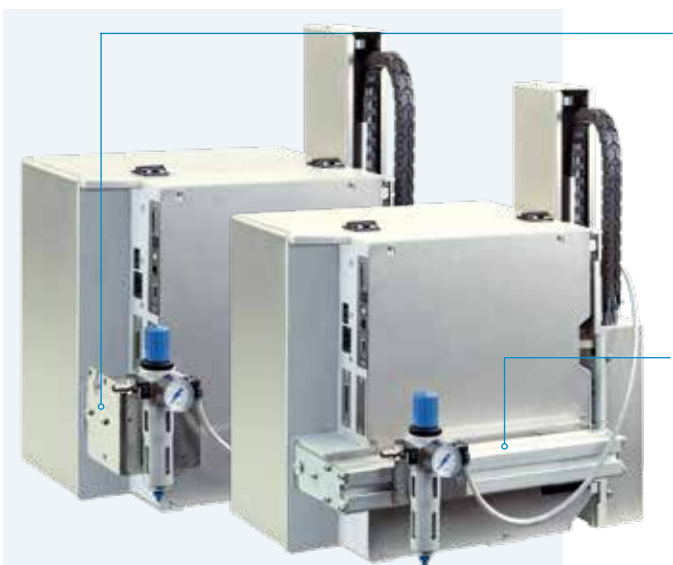

Regulation unit assembly  
with material to attach to the chassis

Regulation unit assembly  
with material to attach to the bracket



# Delivery program HERMES Q

Pos.	Part no.	Label printers L	Part no.	Print heads	dpi	Part no.	Print rollers	Part no.	Draw rollers
1.1	<b>6010001</b>	Label printer HERMES Q2L/300-2S	<b>5977384.001</b>	Print head 2	300	<b>5954102.001</b>	Print roller DR2	<b>5961015.001</b>	Draw roller ZR2
	<b>6010002</b>	Label printer HERMES Q2L/600-2S	<b>5977385.001</b>	Print head 2	600				
1.2	<b>6010003</b>	Label printer HERMES Q2L/300-2	<b>5977384.001</b>	Print head 2	300	<b>5954102.001</b>	Print roller DR2	<b>5961015.001</b>	Draw roller ZR2
	<b>6010004</b>	Label printer HERMES Q2L/600-2	<b>5977385.001</b>	Print head 2	600				
1.3	<b>6010005</b>	Label printer HERMES Q4L/300-2	<b>5977444.001</b>	Print head 4	300	<b>5954180.001</b>	Print roller DR4	<b>5961298.001</b>	Draw roller ZR4
	<b>6010006</b>	Label printer HERMES Q4L/600-2	<b>5977380.001</b>	Print head 4	600				
	<b>6010007</b>	Label printer HERMES Q4.3L/200-2	<b>5977382.001</b>	Print head 4.3	200				
	<b>6010008</b>	Label printer HERMES Q4.3L/300-2	<b>5977383.001</b>	Print head 4.3	300				
1.1	<b>6010009</b>	Label printer HERMES Q6.3L/200-2	<b>5977386.001</b>	Print head 6.3	200	<b>5954245.001</b>	Print roller DR6	<b>5961220.001</b>	Draw roller ZR6
	<b>6010010</b>	Label printer HERMES Q6.3L/300-2	<b>5977387.001</b>	Print head 6.3	300				
1.1	<b>6010011</b>	Label printer HERMES Q2L/300-3	<b>5977384.001</b>	Print head 2	300	<b>5954102.001</b>	Print roller DR2	<b>5961015.001</b>	Draw roller ZR2
	<b>6010012</b>	Label printer HERMES Q2L/600-3	<b>5977385.001</b>	Print head 2	600				
1.2	<b>6010013</b>	Label printer HERMES Q4L/300-3	<b>5977444.001</b>	Print head 4	300	<b>5954180.001</b>	Print roller DR4	<b>5961298.001</b>	Draw roller ZR4
	<b>6010014</b>	Label printer HERMES Q4L/600-3	<b>5977380.001</b>	Print head 4	600				
	<b>6010015</b>	Label printer HERMES Q4.3L/200-3	<b>5977382.001</b>	Print head 4.3	200				
	<b>6010016</b>	Label printer HERMES Q4.3L/300-3	<b>5977383.001</b>	Print head 4.3	300				
1.3	<b>6010017</b>	Label printer HERMES Q6.3L/200-3	<b>5977386.001</b>	Print head 6.3	200	<b>5954245.001</b>	Print roller DR6	<b>5961220.001</b>	Draw roller ZR6
	<b>6010018</b>	Label printer HERMES Q6.3L/300-3	<b>5977387.001</b>	Print head 6.3	300				

Pos.	Part no.	Label printers L	Part no.	Print heads	dpi	Part no.	Print rollers	Part no.	Draw rollers
1.1	<b>6010021</b>	Label printer HERMES Q2R/300-2S	<b>5977384.001</b>	Print head 2	300	<b>5954102.001</b>	Print roller DR2	<b>5961015.001</b>	Draw roller ZR2
	<b>6010022</b>	Label printer HERMES Q2R/600-2S	<b>5977385.001</b>	Print head 2	600				
1.2	<b>6010023</b>	Label printer HERMES Q2R/300-2	<b>5977384.001</b>	Print head 2	300	<b>5954102.001</b>	Print roller DR2	<b>5961015.001</b>	Draw roller ZR2
	<b>6010024</b>	Label printer HERMES Q2R/600-2	<b>5977385.001</b>	Print head 2	600				
1.3	<b>6010025</b>	Label printer HERMES Q4R/300-2	<b>5977444.001</b>	Print head 4	300	<b>5954180.001</b>	Print roller DR4	<b>5961298.001</b>	Draw roller ZR4
	<b>6010026</b>	Label printer HERMES Q4R/600-2	<b>5977380.001</b>	Print head 4	600				
	<b>6010027</b>	Label printer HERMES Q4.3R/200-2	<b>5977382.001</b>	Print head 4.3	200				
	<b>6010028</b>	Label printer HERMES Q4.3R/300-2	<b>5977383.001</b>	Print head 4.3	300				
1.1	<b>6010029</b>	Label printer HERMES Q6.3R/200-2	<b>5977386.001</b>	Print head 6.3	200	<b>5954245.001</b>	Print roller DR6	<b>5961220.001</b>	Draw roller ZR6
	<b>6010030</b>	Label printer HERMES Q6.3R/300-2	<b>5977387.001</b>	Print head 6.3	300				
1.1	<b>6010031</b>	Label printer HERMES Q2R/300-3	<b>5977384.001</b>	Print head 2	300	<b>5954102.001</b>	Print roller DR2	<b>5961015.001</b>	Draw roller ZR2
	<b>6010032</b>	Label printer HERMES Q2R/600-3	<b>5977385.001</b>	Print head 2	600				
1.2	<b>6010033</b>	Label printer HERMES Q4R/300-3	<b>5977444.001</b>	Print head 4	300	<b>5954180.001</b>	Print roller DR4	<b>5961298.001</b>	Draw roller ZR4
	<b>6010034</b>	Label printer HERMES Q4R/600-3	<b>5977380.001</b>	Print head 4	600				
	<b>6010035</b>	Label printer HERMES Q4.3R/200-3	<b>5977382.001</b>	Print head 4.3	200				
	<b>6010036</b>	Label printer HERMES Q4.3R/300-3	<b>5977383.001</b>	Print head 4.3	300				
1.3	<b>6010037</b>	Label printer HERMES Q6.3R/200-3	<b>5977386.001</b>	Print head 6.3	200	<b>5954245.001</b>	Print roller DR6	<b>5961220.001</b>	Draw roller ZR6
	<b>6010038</b>	Label printer HERMES Q6.3R/300-3	<b>5977387.001</b>	Print head 6.3	300				

Part no.	Label printers with options
<b>xxxxxxx.201</b>	Label printer HERMES Q with a cover suitable for label roll diameters up to 205 mm
<b>xxxxxxx.202</b>	Label printers HERMES Q4 and HERMES Q6.3 with automatic saving
<b>xxxxxxx.203</b>	Label printers HERMES Q4 and HERMES Q6.3 with a cover and automatic saving suitable for label roll diameters up to 205 mm

**xxxxxxx** Choose device from Pos. 1.1-1.3  
**on request** 40 mm label roll core diameter capacity suitable for HERMES Q2 and HERMES Q4  
 Adapter for core diameter 50 mm

Type code		
Label printer HERMES Q		
Label width	58 mm <b>2</b> 114 mm <b>4</b> 174 mm <b>6.3</b>	
Direction of label transfer	to the left <b>L</b> to the right <b>R</b>	
Printable resolution	200 dpi <b>200</b> 300 dpi <b>300</b> 600 dpi <b>600</b>	
for label roll outside diameters up to	205 mm <b>2</b>	
for label roll outside diameters up to	305 mm <b>3</b>	























Scope of delivery
Label printer HERMES Q Power cable Type E+F, length 1.8 m Connecting cable USB, length 1.8 m Operating manual DE/EN <b>DVD:</b> Operating manual DE/EN Configuration manual DE/EN/FR Service manual DE/EN Spare parts list DE/EN Programming manual EN WHQL certified Windows printer drivers for Windows Vista      Server 2008 Windows 7          Server 2008 R2 Windows 8          Server 2012 Windows 8.1        Server 2012 R2 Windows 10         Server 2016 Server 2019 Apple Mac OS X printer drivers DE/EN/FR Linux printer drivers DE/EN/FR Label software cablabel S3 Lite cablabel S3 Viewer Database Connector

Scopes of delivery, design and technical specifications correspond to the date of the printing. Subject to change. The data provided in the catalog do not represent any warranty or guarantee.














Information is also available on the Internet:  
[www.cab.de/en/hermesq](http://www.cab.de/en/hermesq)

# Delivery program of applicators L

Pos.	Part no.	Applicators L	Part no.	Transfer modules
4.1	 <b>5970075</b>	Swing applicator 3214L-40	xxxxxxx xxxxxxx xxxxxxx xxxxxxx	Tamp pad Tamp pad with damping layer Tamp pad with label stop Blow pad 3214L-11 F W x H 3214L-12 F W x H 3214L-61 F W x H 3214L-2100 W x H
4.2	 <b>5966109</b> <b>5966110</b> <b>5966111</b>	Stroke applicator 4114L-200	xxxxxxx	Tamp pad 4114L-11 F W x H
		Stroke applicator 4114L-300	xxxxxxx	Tamp pad with damping layer 4114L-12 F W x H
4.2	 <b>5971795</b> <b>5972016</b> <b>5972017</b>	Stroke applicator 4116L-200	xxxxxxx	Tamp pad with label stop 4114L-61 F W x H
		Stroke applicator 4116L-400	xxxxxxx xxxxxxx	Blow pad 4114L-2100 W x H Form pad 4114L-8800 W x H
4.3	 <b>5966117</b> <b>5966118</b> <b>5966119</b>	Stroke turn applicator 4214L-200	xxxxxxx	Tamp pad 4214L-11 F W x H
		Stroke turn applicator 4214L-300	xxxxxxx	Tamp pad with damping layer 4214L-12 F W x H
4.3	 <b>5966119</b>	Stroke turn applicator 4214L-400	xxxxxxx xxxxxxx	Tamp pad with label stop 4214L-61 F W x H Blow pad 4214L-2100 W x H
4.4	 <b>5966133</b> <b>5966134</b> <b>5966135</b>	Stroke applicator 4414L-200	xxxxxxx	Tamp pad 4414L-11 F W x H
		Stroke applicator 4414L-300	xxxxxxx	Tamp pad with damping layer 4414L-12 F W x H
4.4	 <b>5966135</b>	Stroke applicator 4414L-400	xxxxxxx	Tamp pad with label stop 4414L-61 F W x H
4.5	 <b>5971625</b> <b>5966168</b> <b>5971640</b>	Swing stroke applicator 4514L-200	xxxxxxx	Blow pad 4514L-2100 W x H
		Swing stroke applicator 4514L-300		
4.5	 <b>5971640</b>	Swing stroke applicator 4514L-400		
4.6	 <b>5971815</b>	Flag applicator 4712L-300		
4.7	 <b>5970100</b> <b>5970101</b> <b>5970102</b>	Front side applicator 3014L-200	xxxxxxx	Tamp pad 3014L-1100 W x H
		Front side applicator 3014L-300	xxxxxxx	Tamp pad spring-mounted 3014L-3100 W x H
4.7	 <b>5970102</b>	Front side applicator 3014L-400	xxxxxxx	Blow pad 3014L-2100 W x H
4.8	 <b>5966101</b> <b>5966102</b> <b>5966103</b>	Stroke applicator 4014L-200	<b>5966147</b>	Universal pad 4014L-1100 75 x 60
		Stroke applicator 4014L-300	<b>5966148</b>	Universal pad 4014L-1100 90 x 90
4.8	 <b>5966103</b>	Stroke applicator 4014L-400	<b>5966149</b> <b>5966150</b>	Universal pad spring-mounted 4014L-3100 116 x 102 Universal pad spring-mounted 4014L-3100 116 x 152
4.8	 <b>5966161</b> <b>5966162</b> <b>5966163</b>	Stroke applicator 4016L-200	xxxxxxx	Tamp pad 4014L-11 F W x H
		Stroke applicator 4016L-300	xxxxxxx	Blow pad 4014L-2100 W x H
4.8	 <b>5966163</b>	Stroke applicator 4016L-400	xxxxxxx	Tamp pad spring-mounted 4014L-3100 W x H
4.9	 <b>5971720</b> <b>5971725</b> <b>5971730</b>	Stroke blow applicator 4614L-200	xxxxxxx	Blow pad 4614L-2100 W x H
		Stroke blow applicator 4614L-300		
4.9	 <b>5971730</b>	Stroke blow applicator 4614L-400		
4.10	 <b>5966144</b>	Demand module 5114L		
4.11	 <b>5972730</b> <b>5972750</b>	Vacuum belt applicator 5314L-3		
		Vacuum belt applicator 5316L-3		
4.11	 <b>5972940</b> <b>5972920</b>	Vacuum belt applicator 5414L-3		
		Vacuum belt applicator 5416L-3		
4.12	 <b>5984810</b>	Air jet box 5 templates are included 6114L	<b>5984709.001</b>	Template (5 are included in a pack unit) 6114 L/R

# Delivery program of applicators R

Pos.	Part no.	Applicators R	Part no.	Transfer modules	
4.1	 <b>5971655</b>	Swing applicator 3214R-40	xxxxxxx xxxxxxx xxxxxxx xxxxxxx	Tamp pad Tamp pad with damping layer Tamp pad with label stop Blow pad 3214R-11 F W x H 3214R-12 F W x H 3214R-61 F W x H 3214R-2100 W x H	
4.2		<b>5966113</b> <b>5966114</b> <b>5966115</b>	Stroke applicator 4114R-200 Stroke applicator 4114R-300 Stroke applicator 4114R-400	xxxxxxx xxxxxxx xxxxxxx xxxxxxx xxxxxxx	Tamp pad Tamp pad with damping layer Tamp pad with label stop Blow pad Form pad 4114R-11 F W x H 4114R-12 F W x H 4114R-61 F W x H 4114R-2100 W x H 4114R-8800 W x H
		<b>5972018</b> <b>5972019</b> <b>5972020</b>	Stroke applicator 4116R-200 Stroke applicator 4116R-300 Stroke applicator 4116R-400	xxxxxxx xxxxxxx xxxxxxx xxxxxxx	Tamp pad Tamp pad with damping layer Tamp pad with label stop Form pad 4116R-11 F W x H 4116R-12 F W x H 4116R-61 F W x H 4116R-8800 W x H
4.3		<b>5966121</b> <b>5966122</b> <b>5966123</b>	Stroke turn applicator 4214R-200 Stroke turn applicator 4214R-300 Stroke turn applicator 4214R-400	xxxxxxx xxxxxxx xxxxxxx xxxxxxx	Tamp pad Tamp pad with damping layer Tamp pad with label stop Blow pad 4214R-11 F W x H 4214R-12 F W x H 4214R-61 F W x H 4214R-2100 W x H
4.4		<b>5966137</b> <b>5966138</b> <b>5966139</b>	Stroke applicator 4414R-200 Stroke applicator 4414R-300 Stroke applicator 4414R-400	xxxxxxx xxxxxxx xxxxxxx	Tamp pad Tamp pad with damping layer Tamp pad with label stop 4414R-11 F W x H 4414R-12 F W x H 4414R-61 F W x H
4.5		<b>5966950</b> <b>5971460</b> <b>5971700</b>	Swing stroke applicator 4514R-200 Swing stroke applicator 4514R-300 Swing stroke applicator 4514R-400	xxxxxxx	Blow pad 4514R-2100 W x H
4.7		<b>5970106</b> <b>5970107</b> <b>5970108</b>	Front side applicator 3014R-200 Front side applicator 3014R-300 Front side applicator 3014R-400	xxxxxxx xxxxxxx xxxxxxx	Tamp pad Tamp pad spring-mounted Blow pad 3014R-1100 W x H 3014R-3100 W x H 3014R-2100 W x H
		<b>5970109</b> <b>5970110</b> <b>5970111</b>	Front side applicator 3016R-200 Front side applicator 3016R-300 Front side applicator 3016R-400	xxxxxxx xxxxxxx	Tamp pad Tamp pad spring-mounted 3016R-1100 W x H 3016R-3100 W x H
4.8		<b>5966105</b> <b>5966106</b> <b>5966107</b>	Stroke applicator 4014R-200 Stroke applicator 4014R-300 Stroke applicator 4014R-400	<b>5966140</b> <b>5966141</b> <b>5966142</b> <b>5966143</b>	Universal pad Universal pad Universal pad spring-mounted Universal pad spring-mounted 4014R-1100 75 x 60 4014R-1100 90 x 90 4014R-3100 116 x 102 4014R-3100 116 x 152
		<b>5966165</b> <b>5966166</b> <b>5966167</b>	Stroke applicator 4016R-200 Stroke applicator 4016R-300 Stroke applicator 4016R-400	xxxxxxx xxxxxxx xxxxxxx	Tamp pad Tamp pad spring-mounted Roll-on pad 4016R-11 F W x H 4016R-3100 W x H 4016R-4100 W x H
4.9		<b>5971735</b> <b>5971740</b> <b>5971745</b>	Stroke blow applicator 4614R-200 Stroke blow applicator 4614R-300 Stroke blow applicator 4614R-400	xxxxxxx	Blow pad 4614R-2100 W x H
4.10		<b>5966145</b>	Demand module 5114R		
4.11		<b>5972740</b> <b>5972760</b>	Vacuum belt applicator 5314R-3 Vacuum belt applicator 5316R-3		
		<b>5972950</b> <b>5972930</b>	Vacuum belt applicator 5414R-3 Vacuum belt applicator 5416R-3		
4.12		<b>5984800</b>	Air jet box 5 templates are included 6114R	<b>5984709.001</b>	Template (5 are included in a pack unit) 6114 L/R

xxxxxxx - user specific part no. following request

## Delivery program of HERMES Q accessories

Pos.	Part no.	Accessories
2.1	<b>5977370</b>	SD memory card 8 GB
2.2	<b>5977730</b>	USB memory stick 8 GB
2.3	<b>5978912.001</b>	USB WLAN stick 2.4 GHz 802.11b/g/n
2.4	<b>5977731</b>	USB WLAN stick with a rod antenna 2.4 GHz 802.11b/g/n + 5 GHz a/n/ac
2.5	<b>5977732</b>	USB Bluetooth adapter
2.6	<b>5970071</b>	Product sensor, 3 pin
2.7	<b>5964300</b>	Product sensor, 25 pin
2.8	<b>6010520</b>	2-Port Ethernet Switch 10/100 Mbit/s
2.9	<b>5917651</b>	I/O interface connector SUB-D, 25 pin
2.10	<b>6010560</b>	Warning light in preparation
2.11	<b>5954978.001</b> <b>5954985.001</b> <b>5954979.001</b>	Print roller DRS2 Print roller DRS4 Print roller DRS6
2.12	<b>5961640.001</b> <b>5961642.001</b> <b>5961644.001</b> <b>5961646.001</b>	Antistatic brush 2L Antistatic brush 2R Antistatic brush 4L Antistatic brush 4R
2.13	<b>5961650</b>	Margin stop
2.14	<b>5954380</b>	External operation panel
	<b>5907718</b>	Connecting cable USB, 1.8 m
	<b>5907730</b>	Connecting cable USB, 3 m
	<b>5907750</b>	Connecting cable USB, 5 m
	<b>5907760</b> <b>5907765</b>	Connecting cable USB, 11 m Connecting cable USB, 16 m
2.15	<b>5948205</b>	Label selection - I/O box
2.16	<b>5955710</b>	Hand switch TR2
2.17	<b>5955711</b>	Foot switch
2.18	<b>5550818</b>	Connecting cable RS232 C 9/9 pin, length 3 m
2.19	on request	Barcode tester CC200

Pos.	Part no.	Options (assembly ex factory)	
3.1	<b>6010500</b> <b>6010501</b> <b>6010502</b>	Cover 2L Cover 4L Cover 6L	
	<b>6010503</b> <b>6010504</b> <b>6010505</b>	Cover 2R Cover 4R Cover 6R	
3.2	on request	Extended peel-off plate HERMES Q2 Extended peel-off plate HERMES Q4 Extended peel-off plate HERMES Q6.3	
Pos.	Part no.	Assembly aids	
6.1	<b>5965940</b>	Adapter plate	
6.2	on request	Profile (customer-specific length)	
6.3	<b>5961203</b>	Base plate 500 x 255 mm	
6.4	<b>5958400</b>	Mounting plate	
6.5	<b>5955685</b>	Bracket	
6.6	<b>8914443</b>	Clamped joint for profile 50 x 50 mm	
6.7	<b>8914444</b>	Flanged joint for profile 50 x 50 mm	
6.8	<b>5970113</b>	Floor stand 1601	
6.9	<b>5970112</b>	Floor stand 1602	
Pos.	Part no.	Label software	
7.6	Freeware	cablabel S3 Lite (Download at cab.de/en)	
	<b>5588001</b> <b>5588100</b> <b>5588101</b> <b>5588150</b> <b>5588151</b> <b>5588152</b>	cablabel S3 Pro, 1 WS cablabel S3 Pro, 5 WS cablabel S3 Pro, 10 WS cablabel S3 Pro, 1 additional licence cablabel S3 Pro, 4 additional licences cablabel S3 Pro, 9 additional licences	
	<b>5588002</b> <b>5588105</b> <b>5588106</b> <b>5588155</b> <b>5588156</b> <b>5588157</b>	cablabel S3 Print, 1 WS cablabel S3 Print, 5 WS cablabel S3 Print, 10 WS cablabel S3 Print, 1 additional licence cablabel S3 Print, 4 additional licences cablabel S3 Print, 9 additional licences	
	in preparation	cablabel S3 Print Server	
	<b>9008486</b>	Programming manual EN, printed copy	
	7.10		

## Delivery program of applicator accessories

Pos.	Part no.	Accessories
5.13	<b>5964277.001</b> <b>5964095.001</b> <b>5964614.001</b>	Blow tube 2" Blow tube 4" Blow tube 6"
5.14	<b>5955735</b> <b>5955736</b>	Compressed air regulation unit L Compressed air regulation unit R

Pos.	Part no.	Accessories
5.16	<b>5984805</b>	Compressed air regulation unit L with shut-off valve for air jet box 6114L
	<b>5984795</b>	Compressed air regulation unit R with shut-off valve for air jet box 6114R
5.17	<b>596xxxx.212</b>	Pressure reducing valve

# cab product overview

**Label printers MACH1, MACH2**  
in the lower price segment



**Label printers MACH 4S**  
where little space is available



**Label printers EOS2**  
Desktop device for label rolls up to diameter 152 mm



**Label printers EOS5**  
Desktop device for label rolls up to diameter 203 mm



**Label printers SQUIX 2**  
Industrial device for print widths up to 57 mm



**Label printers SQUIX 4**  
Industrial device for print widths up to 108 mm



**Label printers SQUIX 6.3**  
Industrial device for print widths up to 168 mm



**Label printers A8+**  
Industrial device for print widths up to 216 mm



**Label printers XD4T**  
for double-sided printing



**Label printers XC**  
for two-color printing



**Print and apply systems HERMES Q**  
for automation



**Print and apply systems Hermes C**  
for two-color printing and applying



**Print modules PX**  
to be integrated in labeling machines



**Labels**  
made from more than 400 materials



**Ribbons**  
in wax, resin and resin/wax qualities



**Label software cablabel S3**  
Design, print, control



**Label dispensers HS, VS**  
for horizontal or vertical dispense



**Labeling heads IXOR**  
to be integrated in labeling machines



**Marking lasers XENO 4**  
in 19" housings



**Laser marking systems**  
in desktop housings



Germany  
**cab Produkttechnik GmbH & Co KG**  
Karlsruhe  
Phone +49 721 6626 0  
[www.cab.de](http://www.cab.de)

France  
**cab Technologies S.à.r.l.**  
Niedermodern  
Phone +33 388 722501  
[www.cab.de/fr](http://www.cab.de/fr)

USA  
**cab Technology, Inc.**  
Chelmsford, MA  
Phone +1 978 250 8321  
[www.cab.de/us](http://www.cab.de/us)

Mexico  
**cab Technology, Inc.**  
Juárez  
Phone +52 656 682 4301  
[www.cab.de/es](http://www.cab.de/es)

Taiwan  
**cab Technology Co., Ltd.**  
Taipei  
Phone +886 (02) 8227 3966  
[www.cab.de/tw](http://www.cab.de/tw)

China  
**cab (Shanghai) Trading Co., Ltd.**  
Shanghai  
Phone +86 (021) 6236 3161  
[www.cab.de/cn](http://www.cab.de/cn)

China  
**cab (Shanghai) Trading Co., Ltd.**  
Guangzhou  
Phone +86 (020) 2831 7358  
[www.cab.de/cn](http://www.cab.de/cn)

South Africa  
**cab Technology (Pty) Ltd.**  
Randburg  
Phone +27 11 886 3580  
[www.cab.de/za](http://www.cab.de/za)

**cab // 820 distribution partners in more than 80 countries**

**cab**  
*we identify more*